DYMAXRAIL

BUILT TO LAST.

MPX HYDROSTATIC CART

RETAIN EXCAVATOR VALUE.

NO ROTARY MANIFOLD CHANGEOUT.

MPX - HYDROSTATIC HI-RAIL CART

The **DymaxRail MPX hydrostatic hi-rail cart** quickly adapts to excavators and specialized machines. MPX is driven by your machines hydraulic power and requires no machine modifications. Easily adapt the MPX control kit to your machine and in less than a day you're ready to ride the rails.

Ideal for tracked excavator machines ranging from 8 ton in size up to 36 ton in size. Easily reach remote rail site locations that can only be accessed via rail. Rail networks and contractors now have the ability to better handle jobs like disaster response as well as a multitude of track maintenance and construction jobs. **Do more with DymaxRail's MPX hydrostatic hi-rail cart.**

SETUP IN 1 DAY

LIFT, PLACE, CONNECT AND GO!

MAXIMIZE FLEET VERSATILITY

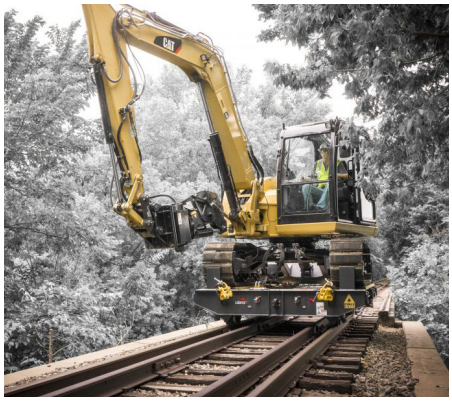

DYMAX

DYMAXRAIL
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com

2WD MPX MODELS FOR 8T-36T EXCAVATOR MACHINES (STANDARD TRACK GAUGE 1435MM)

Model 810 suited for max rated machine of 30,000 lbs. Requires minimum 5,000lb lift capacity to place to and from tracks		
DX-RC-MPX-810 Series-2WD	**Rail Cart – Hydrostatic MPX – 810 series – 2 wheel drive** Standard Features: 12 mph • 96in wide • Wood Deck • Single Hydrostatic Drive • Solar powered lighting systems • Alarm • Spot lamp • hydraulic park & service brakes • Excavator control group	4,680
Model 1214 suited for max rated machine of 45,000 lbs. Requires minimum 9,000lb lift capacity to place to and from tracks		
DX-RC-MPX-1214 Series-2WD	**Rail Cart – Hydrostatic MPX – 810 series – 2 wheel drive** Standard Features: 12 mph • 102in wide • Wood Deck • Single Hydrostatic Drive • Solar powered lighting systems • Alarm • Spot lamp • hydraulic park & service brakes Excavator control group	8,500
Model 1620 suited for max rated machine of 60,000 lbs. Requires minimum 12,500lb lift capacity to place to and from tracks		
DX-RC-MPX-1620 Series-2WD	**Rail Cart – Hydrostatic MPX – 810 series – 2 wheel drive** Standard Features: 12 mph • 102in wide x 126in on rail • Wood Deck • Single Hydrostatic Drive • Solar powered lighting systems • Alarm • Spot lamp • hydraulic park & service brakes • Excavator control group	12,000
Model 2530 suited for max rated machine of 85,000 lbs. Requires minimum 16,000lb lift capacity to place to and from tracks		
DX-RC-MPX-2530 Series-2WD	**Rail Cart – Hydrostatic MPX – 2530 series – 2 wheel drive** Standard Features: 12 mph • 102in wide x 126in on rail • Wood Deck • Single Hydrostatic Drive • Solar powered lighting systems • Alarm • Spot lamp • hydraulic park & service brakes • Excavator control group	15,000

Design and specifications are subject to change without notice.
Options are available depending on your requirements. Contact DymaxRail for more information.
Weight shown is (pounds)

CONTROL GROUP

Each Dymax MPX cart is provided with a machine interface control group. Control group features control valves and disconnects ready to work with the Dymax MPX. Allow 1 day to install.

POWER & SPEED + YOU CAN TOW IT.

Dymax MPX features a standard 2wd powered axle. Speed up ot 13 mph on rail. Unique integrated towing hub allows operators to tow the cart if needed.

OPTIONS

- Manual or hydraulic rail clamps
- Specialty trailers with hydraulic brakes
- 4wd solutions (two powered axles)
- Specialized motor solutions for faster speed
- Toolbox
- Specialized bogies for tight radius turns
- 3rd rail system clearance design
- Available for different track gauges

DYMAX

DYMAXRAIL
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com