


BALLAST BLASTER PINGRAB COUPLER

B180 - EXCAVATOR 18-36T

- 180° rotation
- Hydraulic bar tilt
- 10ft, 12ft and 15ft cut lengths




3



2

B360-EXCAVATOR 14-20T

- 360° rotation
- Hydraulic bar tilt
- 10ft cut length

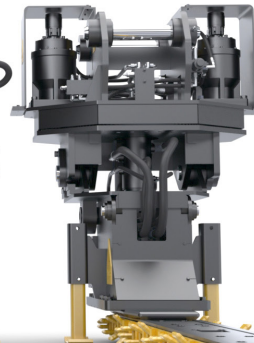


B360 - EXCAVATOR 25-36T

- 360° rotation
- Hydraulic bar tilt
- 12ft and 15ft cut lengths

1

DCT - Dual tipped carbide cutting teeth.

4

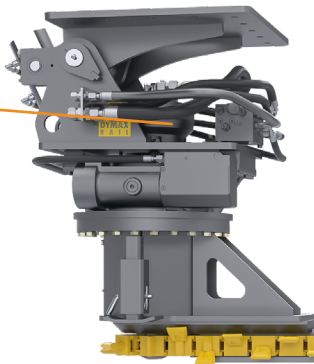

B360 - BACKHOE & EXCAVATOR 8-11T

- 360° rotation
- Hydraulic bar tilt
- 6ft and 8ft cut lengths



BALLAST BLASTER UNDERCUTTER FOR PINGRAB COUPLER CONNECTION

DYMAXRAIL's **Ballast Blaster** outperforms all other methods for ballast removal. Some rail networks prefer it to conventional on-track ballast cleaners, as they are more efficient and easier to get on and off track, especially congested networks with severe time restraints.

KEY FEATURES

1. Replaceable carbide wear plates deliver longest wear service life in industry.
2. Bidirectional cutting chain with dual-tipped carbide cutting tooth (DCT Models). Available with optional rotating carbide bit teeth available upon request.
3. Automatic chain tension systems for 13-36T models keep operators cutting through miles of track without stopping to tension chains.
4. Powerful well protected chain drive motor delivers more power for fast excavation of fouled ballast.

Model ID	Model Code	Description	Weight (lbs)
For Backhoe Loader and 8-11 Ton Excavators			
Standard Features: 4.1in (104mm) cut width • Patented Bar with replaceable carbide wear plates • Mechanical Chain Adjuster Sample Machine Sizes: Deere 710, 85 & Caterpillar 440, 450, 308, 309, 310, 311 & Komatsu PC78, PC88, PC110.			
2338	DX-UC-B360-6ftxADCT-HX-8T	Undercutter-Ballast Blaster 360 degree rotation-6 feet cutting length x Size "A" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-8 Ton	1850
2339	DX-UC-B360-8ftxADCT-HX-8T	Undercutter-Ballast Blaster 360 degree rotation-8 feet cutting length x Size "A" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-8 Ton	2200
2340	DX-UC-B360-8ftxADCT-BL-20	Undercutter-Ballast Blaster 360 degree rotation-8 feet cutting length x Size "A" chain with DymaxRail Carbide Teeth-Backhoe Loader-Class 20	2200
2341	DX-UC-B360-8ftxADCT-HX-11T	Undercutter-Ballast Blaster 360 degree rotation-8 feet cutting length x Size "A" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-11 Ton	2280
For Excavators 13-18 Ton Excavators			
Standard Features: • 6.1in (155mm) cut width • Patented Bar with replaceable carbide wear plates • Auto chain adjuster Sample Machines Sizes: Caterpillar-313,M313,314,315,M316,M318 & John Deere-160,190 & Komatsu-PC130, PC138, PC160			
2329	DX-UC-B360-10ftxCDCT-HX-14T	Undercutter-Ballast Blaster 360 degree rotation-10 feet cutting length x Size "C" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-14 Ton	5300
For Excavators 20-36 Ton Excavators: 6.1in Cut Width			
Standard Features: 6.1in (155mm) cut width • Patented Bar with replaceable carbide wear plates • Auto chain adjuster Sample Machine Sizes: Caterpillar 319, 320, 321,323, 324, 325, 326, 328, 329, 330,336 & John Deere 190, 200, 210, 245, 300, 350			
2330	DX-UC-B360-12ftxBRCB-HX-25T	Undercutter-Ballast Blaster 360 degree rotation-12 feet cutting length x Size "B" chain with Rotate Carbide Bits-Hydraulic Excavator-25 Ton	6700
2334	DX-UC-B360-12ftxBDCT-HX-30T	Undercutter-Ballast Blaster 360 degree rotation-12 feet cutting length x Size "B" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-30 Ton	6800
2335	DX-UC-B360-12ftxCDCT-HX-30T	Undercutter-Ballast Blaster 360 degree rotation-12 feet cutting length x Size "C" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-30 Ton	6800
2336	DX-UC-B360-15ftxCRCB-HX-30T	Undercutter-Ballast Blaster 360 degree rotation-15 feet cutting length x Size "C" chain with Rotate Carbide Bits-Hydraulic Excavator-30 Ton	7400
2337	DX-UC-B360-15ftxCDCT-HX-30T	Undercutter-Ballast Blaster 360 degree rotation-15 feet cutting length x Size "C" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-30 Ton	7400
Models below are 180 degrees rotation options			
2328	DX-UC-B180-10ftxCDCT-HX-20T	Undercutter-Ballast Blaster Tiltrotator-15 feet cutting length x Size "C" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-25 Ton	5500
2333	DX-UC-B180-12ftxCDCT-HX-25T	Undercutter-Ballast Blaster 180 degree rotation-12 feet cutting length x Size "C" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-20 Ton	6000
2382	DX-UC-B180-15ftxCDCT-HX-30T	Undercutter-Ballast Blaster 180 degree rotation-15 feet cutting length x Size "C" chain with DymaxRail Carbide Teeth-Hydraulic Excavator-30 Ton	6600
Design and specifications are subject to change without notice : DCT = DymaxRail Carbide Teeth; RCB = Rotate Carbide Bit			

Hydraulic Requirements	Motor/Chain Drive	Rotator	Bar Tilt
Model ID #	Type: Two-way flow + drain	Type: Two-way flow	Electro-hydraulic
2338, 2339, 2340, 2341 (6-8ft models)	26-32 GPM / 4200 psi	8 GPM / 3000 psi	Valve on tool: Requires installation of service cable kit.
2328, 2329 (10ft models)	36-40 GPM / 4500 psi	8 GPM / 3000 psi	
2330,2333,2334,2335 (12ft models)	40-42 GPM / 4500 psi	8 GPM / 3000 psi	
2336, 2337, 2382 (15ft models)	45-50 GPM / 4500 psi	8 GPM / 3000 psi	



DYMAXRAIL | Toll Free: 800.530.5407 (USA/CAN)
402 Miller Drive | Office: +1.785.456.2081
Wamego, KS 66547 USA | Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com