

INDUSTRIAL TRANSFER RAILCARTS

6255D1-22T 6ftx12ft

- Tow hitch, park brake
- Open deck, 16" wheels




5979D1-30T 6ftx12ft

- Tow hitch
- Park brake
- Plate decking
- 16" wheels




5144D1-10T 4ftx8ft

- Rubber lined pipe saddles

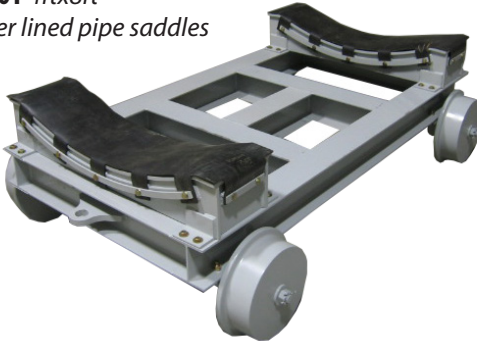

7232D1-30T 6ftx10ft

- Tow hitch, park brake, plate decking, 16" wheels, sweeps, lift chains

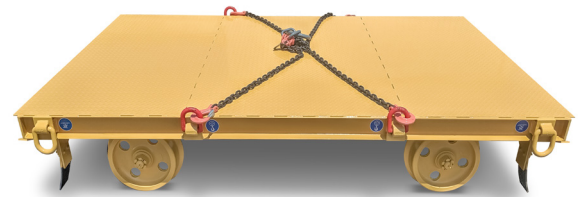

8266D1-15T 6ftx15ft

- Fork pockets, lowdeck height @ 15", park brake



INDUSTRIAL RAILCART SOLUTIONS

DymaxRail offers an innovative range of industrial railcarts designed to move heavy structures and equipment with unparalleled durability and precision. From hydroelectric turbines to aerospace components, our railcarts are trusted for their reliability in industries demanding exceptional performance. Whether it's transporting welded fabrications, drilling rigs for soil stabilization, or equipment for ship unloading, we deliver tailored solutions for non-traditional rail applications that exceed expectations.



Anti-tip legs

8314D1-70T 12ftx12ft

- Anti-tip legs
- HD deck
- Park brake
- 70 ton capacity



Tie downs & lift rings

Custom hitch integration


Tug Solutions from DJ Cart Caddy

Park brake wheel

Turn to set

SEAMLESSLY INTEGRATED TRANSPORT SOLUTIONS

The DJ Cart Caddy, a battery-powered tug, pairs seamlessly with DymaxRail Heavy-Duty Industrial Carts to deliver a turnkey, job-matched transport solution—ready to work from day one.

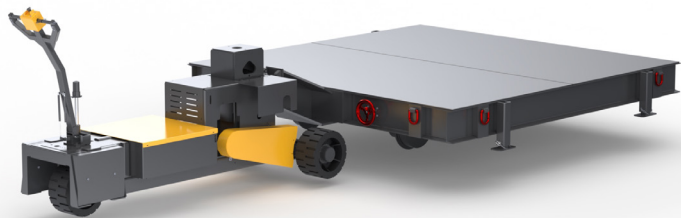

DYMAXRAIL | Toll Free: 800.530.5407 (USA/CAN)
402 Miller Drive | Office: +1.785.456.2081
Wamego, KS 66547 USA | Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com

INDUSTRIAL CARTS

| Group No: Model Number Carts Listed are for Standard Gauge: 1435mm / 56.50 inches. (Size listed is feet) x (P = Park Brake) | Park Brake | Load Rating (US Tons) | Height Off Rail (inches) | Weight (lbs) |
|--|------------|--------------------------|-----------------------------|--------------|
| 5144D1: DX-RC-INDT-4x8P-DMX-06TC - Industrial Transfer Cart Width: 4 feet / Length: 8 feet <i>Pipe saddles with rubber lining *Shown on Front Page</i> | Yes | 6 | 17 | 2,140 |
| 7559D1: DX-RC-INDT-6ft8x7P-DMX-06TC - Industrial Transfer Cart Width: 6 feet 8 inches / Length: 7 feet | Yes | 6 | 17.6 | 2,250 |
| 7537D1: DX-RC-INDT-7x16P-DMX-7.5T - Industrial Transfer Cart Width: 7 feet / Length: 16 feet | Yes | 7.5 | 19 | 4,300 |
| 6992D1: DX-RC-INDT-8ft6x10P-DMX-10TC - Industrial Transfer Cart Width: 8 feet 6 inches / Length: 10 feet | Yes | 10 | 21.9 | 3,300 |
| 8266D1: DX-RC-INDT-6X15P-DMX-15TC - Industrial Transfer Cart Width: 6 feet / Length: 15 feet <i>Low profile design / fork pockets *Shown on Front Page</i> | Yes | 15 | 15 | 3,450 |
| 6255D1: DX-RC-INDT-6x12P-DMX-22TC - Industrial Transfer Cart Width: 6 feet / Length: 12 feet <i>Open deck frame *Shown on Front Page</i> | Yes | 22 | 23.8 | 4,370 |
| 8441D1: DX-RC-INDT-8X24P-DMX-30TC - Industrial Transfer Cart Width: 6 feet / Length: 24 feet <i>Screen deck with removable sections; tube frame castor wheel style design</i> | Yes | 30 | 23.2 | 7,200 |
| 5979D1: DX-RC-INDT-6x12P-DMX-30TC - Industrial Transfer Cart Width: 6 feet / Length: 12 feet <i>Steel deck with traditional design; HD axles *Shown on Front Page</i> | Yes | 30 | 23.9 | 5,970 |
| 7278D1: DX-RC-INDT-6ft5x12P-DMX-30TC - Industrial Transfer Cart Width: 6 feet 5 inches / Length: 12 feet <i>24in wheel size, taller deck</i> | Yes | 30 | 27 | 6,450 |
| DX-RC-INDT-8X8P-DMX-40TC - Industrial Transfer Cart Width: 8 feet / Length: 8 feet | Yes | 40 | 21.5 | 5,500 |
| 6500D1: DX-RC-INDT-7X16P-DMX-60TC - Industrial Transfer Cart Width: 7 feet / Length: 16 feet <i>Steel deck with traditional design; HD axles</i> | Yes | 60 | 23 | 12,600 |
| 6749D1: DX-RC-INDT-7X20P-DMX-60TC - Industrial Transfer Cart Width: 7 feet / Length: 20 feet <i>Steel deck with traditional design; HD axles</i> | Yes | 60 | 23 | 14,950 |
| 8314D1: DX-RC-INDT-12X12P-DMX-70TC - Industrial Transfer Cart Width: 12 feet / Length: 12 feet <i>Steel deck, anti tip stabilizer legs *Shown on 2nd Page with Tug Vehicle by DJ Products</i> | Yes | 70 | 24 | 10,500 |
| Design and specifications are subject to change without notice. | | | | |
| All carts listed feature non-insulated railgear and are suited for standard gauge track 56.50 inches (1435mm). Custom solutions are available for narrow and wide track gauges. Contact DymaxRail Sales 1-800-530-5407 for special applications and options. | | | | |



DYMAXRAIL | Toll Free: 800.530.5407 (USA/CAN)
402 Miller Drive | Office: +1.785.456.2081
Wamego, KS 66547 USA | Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com