



ROADRAIL DROP DECK TRAILER

The DymaxRail Drop Deck Road-Rail Recovery Trailer is a versatile, high-capacity transport solution designed for railway operations, maintenance and recovery applications. Engineered to work in conjunction with hi-railed trucks, this trailer offers seamless on-and-off-track mobility, maximizing efficiency for railway contractors, transit authorities and maintenance teams.


Models Available: 42 or 48 feet with GVWR 60,000 lbs

Key Features and Benefits:

- **High Strength Frame & Deck:** Reinforced steel frame with twin-beam construction for enhanced durability. Open deck with cover plates over tire wells.
- **Specialized Rear Rotating Railway Bogie:** Innovative rear rotational bogie smoothly guides trailer on rail at crossing locations and enables operators to drive to remote locations to unload or recover equipment.
- **Hydraulic Power Unit with Winch:** Gas powered hydraulic power unit with lever controls. High capacity winch with 15T of pull force. Includes fairlead and cable.
- **Rail Ramp and Rail Built-in-Floor:** A bi-fold hydraulic ramp lowers to the rails, ensuring a smooth transition for railway equipment moving between the rails and the trailer deck.
- **Options:** Customized solutions available upon request.



ROADRAIL DROP DECK TRAILER

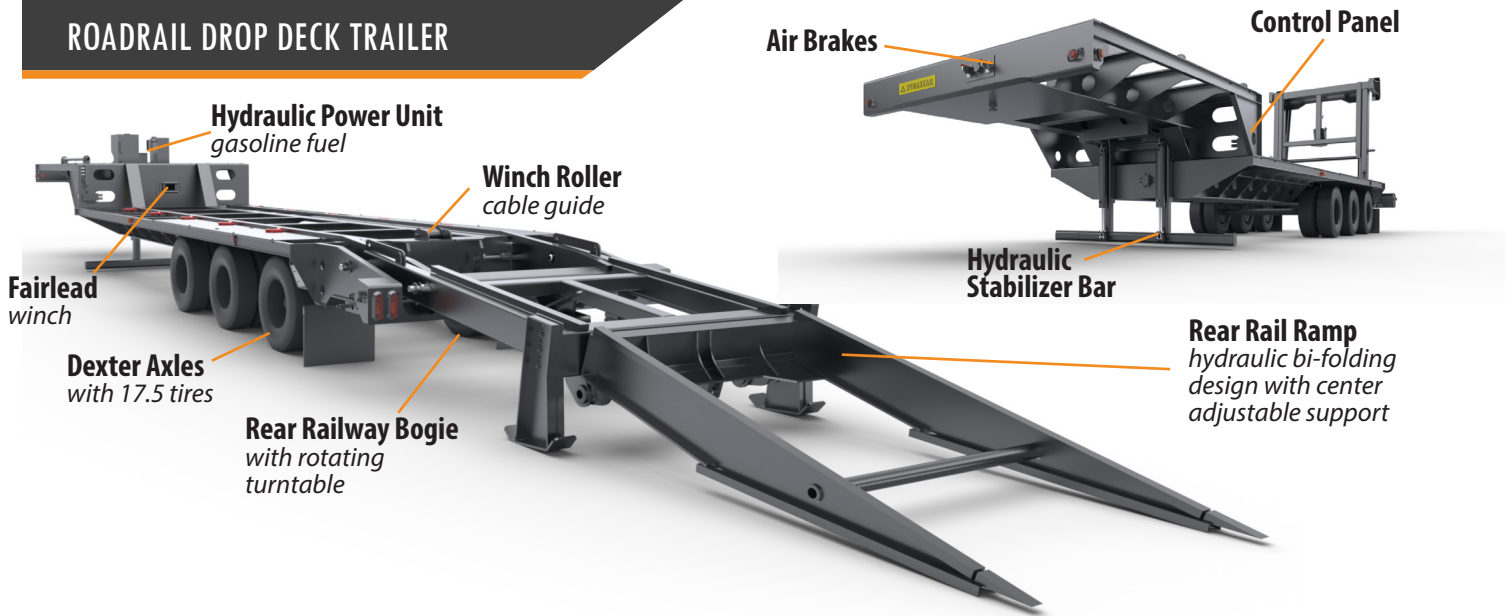

Group No: Model Number	Weight (lbs)
ROADRAIL DROP DECK TRAILERS	
7203D2: DX-RRT-SD3-W102x42ft-DMX-30TC Product works with Hi-Railed Heavy Duty Truck GVWR Rating 60,000 lbs STANDARD FEATURES & SPECIFICATIONS: Load capacity max: 30 tons Overall Length (Ramps Up) Road Position: 42ft Overall Length (Ramps Down) Rail Position: 49ft-6 Overall Width: 101.00 inches / 8ft-5 Deck Length (Usable): 283.54 / 23ft-6 Deck Width (Usable): 101.00 inches / 8ft-5 Deck Height off Rail: 38.3 inches	20,550
8454D1: DX-RRT-SD3-W102x48ft-DMX-30TC Product works with Hi-Railed Heavy Duty Truck GVWR Rating 60,000 lbs STANDARD FEATURES & SPECIFICATIONS: Load capacity max: 30 tons Overall Length (Ramps up) Road Position: 48ft Overall Length (Ramps Down) Rail Position: 56ft-6 Overall Width: 101.00 inches / 8ft-5 Deck Length (Usable): 354.54 / 29ft-6 Deck Width (Usable): 101.00 inches / 8ft-5 Deck Height Off Rail: 38.3 inches	23,000
Road Axles: Dexter heavy duty with 17.5 tires Road & Rail Axle Brakes: Standard air brakes Front Stabilizer: Heavy duty hydraulic stabilizer bar Rear Railgear: DymaxRail twin-axle rotating bogie with hydraulic lift, non-insulated railgear with front and rear sweeps and air brakes with cobra style friction pad.	
Design and specifications are subject to change without notice. Trailers listed feature non-insulated railgear and are suited for standard gauge track 56.50 inches (1435mm). Contact DymaxRail Sales 1-800-530-5407 to learn more or to customize your next drop deck trailer.	



Rear Rotating Railgear

DymaxRail innovative design for fast track access.



Powerful Winching

Built-in hydraulic winch with fairlead for smooth control. (Cable included)



Easy to Use Controls

Located on side of trailer. Remote available upon request.



DYNAMAX RAIL | Toll Free: 800.530.5407 (USA/CAN)
 402 Miller Drive | Office: +1.785.456.2081
 Wamego, KS 66547 USA | Fax: +1.785.456.8328

www.DYNAMAXRAIL.com
sales@DYNAMAXRAIL.com