



## ROADRAIL TAG TRAILER

The DymaxRail Road-Rail Tag Trailer is a highly versatile and innovative equipment transport solution designed to meet the stringent requirements of rail networks. These trailers are fully integrated with railgear technology, providing seamless operation on both rail and road. With customizable designs, DymaxRail ensures each trailer is built to accommodate special envelopes or clearances specific to network needs.

### Key Features and Benefits:

- **High Strength Trailer Frame:** Reinforced design provides less flex on rail, delivering optimum working clearances. Featuring a diamond steel plate deck.
- **Integrated Railgear:** DymaxRail's innovative railgear systems are suited for standard or wide gauge applications with air brakes. Includes hydraulic pump.
- **Heavy Duty Spring Assisted Ramps:** Designed for loading heavy equipment such as excavators or skid loaders. Ramps feature railhead clearance pocket.
- **Options:** Side ramps for platform access, insulated railgear, wide track gauge up to 66", custom solutions to meet platform or 3rd rail networks.



# ROADRAIL TAG TRAILER - 12T

**Rear Ramp**  
with spring assist



**Optional side platform ramps**

**Pump & Battery Box** with control panel

**Jackstand Landing Gear**

**Towbar** with stow rack

**Adjustable Pintle Hitch**

**Two Dexter Axles** with Air Brakes  
235/85R16 tires

**Ratchet Strap** tie downs


**Integrated railgear** front and rear

Group No: Model Number	Weight (lbs)
<b>ROADRAIL TAG TRAILER - 30,000 MAX GVWR</b>	
7052D1: DX-RRT-TG2-102x30ft-DMX-12TC	9,250
STANDARD FEATURES & SPECIFICATIONS:	
<b>Max Carrying Capacity on Trailer:</b> 12 tons / 24,000 lbs	
<b>Overall Length (Ramps Up) Road Position:</b> 356.52 / 29ft-1	
<b>Overall Width:</b> 100 inches / 8ft-4	
<b>Deck Length (Usable):</b> 241.49 / 20ft-1	
<b>Deck Width (Usable):</b> 96.00/ 8ft	
<b>Deck Height Off Rail:</b> 36.00 inches / 3 ft	
<b>Road Axles:</b> Dexter Leaf Spring Design 12,000lb <b>Tracking Width:</b> 70 inches, outside of tires appx 90.50 inches <b>Road Axle Brakes:</b> Standard air brakes <b>Road Axle Wheels:</b> 16x6K; 8 on 6.5 bolt circle <b>Tires:</b> LT235/80R16 <b>Railgear:</b> DymaxRail non-insulated railgear with front and rear sweeps and air brakes with cobra style friction pad. Includes power supply & pump. <b>Road &amp; Rail Lighting:</b> Includes all road and rail lighting systems <b>End Load Ramps:</b> Two spring assisted end load ramps with railhead cutouts.	
<b>OPTIONS:</b> Side platform ramps, insulated railgear, special track gauge, custom design solutions	
Design and specifications are subject to change without notice.	
Trailers listed feature non-insulated railgear and are suited for standard gauge track 56.50 inches (1435mm). Custom solutions are available for narrow and wide track gauges. Contact DymaxRail Sales 1-800-530-5407 for special applications and options.	

**Railgear with Air Brakes**  
Standard, wide gauge and dual gauge options



**Electro-Hydraulic Controls**  
Fully integrated ready to work

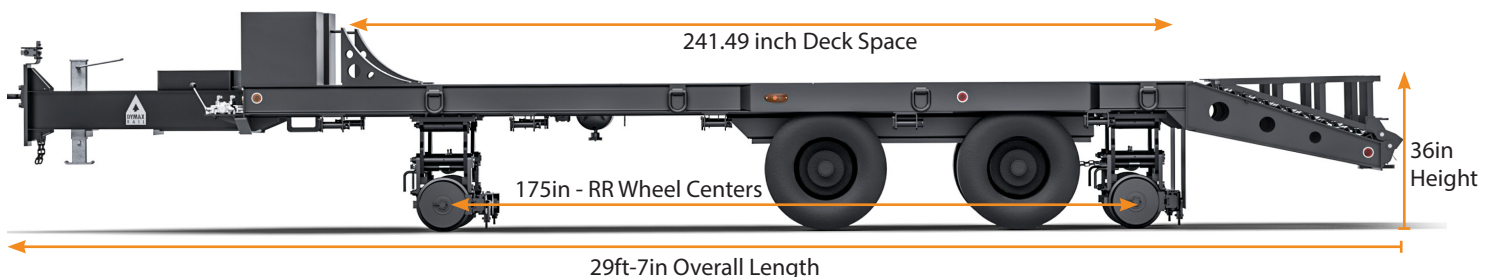

**DYMAXRAIL**  
402 Miller Drive  
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)  
Office: +1.785.456.2081  
Fax: +1.785.456.8328

[www.DYMAXRAIL.com](http://www.DYMAXRAIL.com)  
[sales@DYMAXRAIL.com](mailto:sales@DYMAXRAIL.com)