



TOWABLE MACHINERY CARTS



All Purpose Series 50-100T

TOWABLE MACHINERY CARTS

DymaxRail Machinery Carts are purpose-built for transporting large cranes, cement trucks, excavators, dozers and other heavy equipment to remote locations. Available in 6-ton, 20-ton, 40-ton, and up to 100-ton capacities, these carts provide unmatched reliability for bridge maintenance, infrastructure projects and rail construction.

Available in the following configurations:

- Excavator Series:** Optimized for transporting tracked excavators.
- All Purpose Series:** Designed to accommodate both wheeled and tracked machinery.

Key Features and Benefits:

- High-Strength Frame & Deck:** Reinforced steel frame with Apitong hardwood and grip bars for superior durability.
- Advanced Railgear:** DymaxRail high performance railgear with specialized bogie design for smooth curve navigation on larger models.
- Air Brake System:** Designed for seamless integration with hi-rail trucks and railcar movers.
- Secure Tie Downs & Lift Points:** Strategically placed anchoring points for safe transport and easy placement.
- Solar-Powered LED Lighting:** Red/white directional change lighting with high-intensity LED spot lamps for enhanced visibility.
- Heavy-Duty Ramps & Stabilizers:**
 - Excavator Series:** Welded ramp; 6-ton models feature removable car-hauler-style ramps.
 - All Purpose Series:** Hydraulic ramps with rail clearance pockets for smooth loading.
 - Hydraulic Power Unit:** Integrated system for operating ramps and stabilizers.



EXCAVATOR SERIES TOW CART - 06 TON



Easily removable ramps conveniently stow within the trailer frame for secure storage and quick access.



EXCAVATOR SERIES TOW CART - 40 TON



Directional Lighting

Main power switches



Fixed Ramps

Heavy duty ramps with grouser grab bars



4 Hydraulic Stabilizers
Stability Enhanced




DYMAXRAIL
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com

ALL PURPOSE MACHINERY CART - 50 & 100 TON

Transport cement trucks, wheeled and crawler cranes, excavators and other specialized equipment.

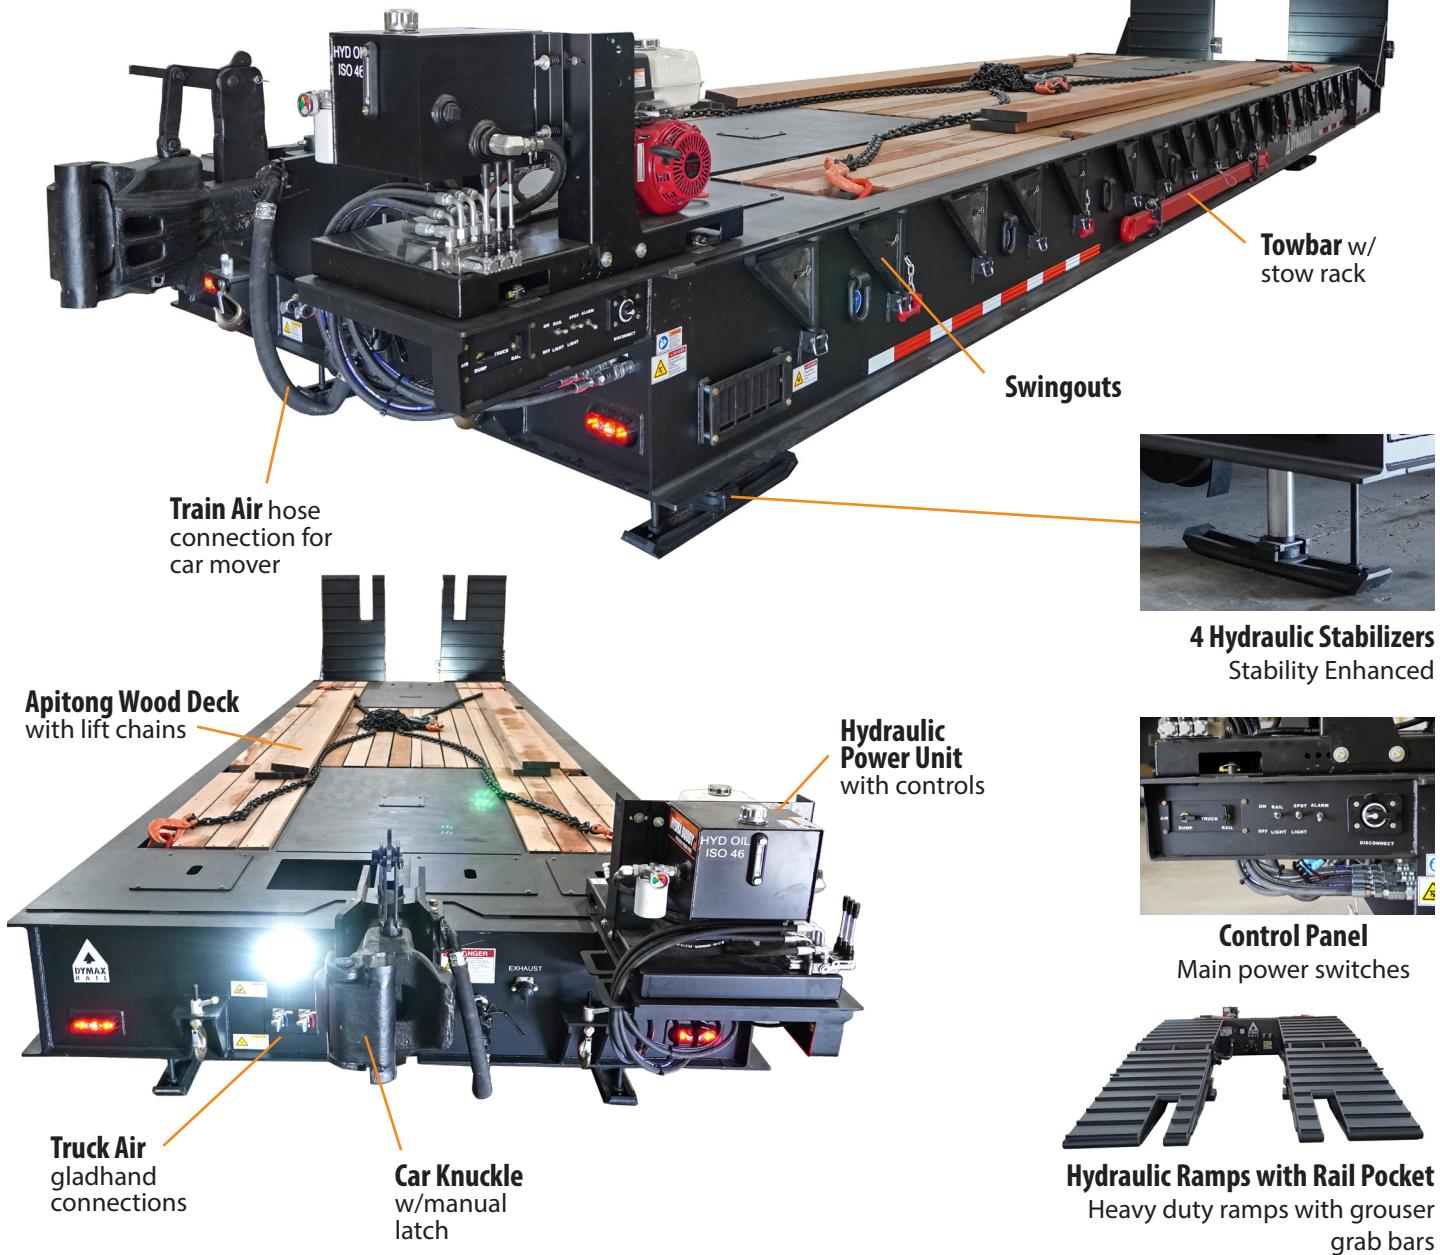

DYMAXRAIL
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com

Group No: Model Number Carts Listed are for Standard Gauge: 1435mm / 56.50 inches.	Special Features	Max Load Rating (US Tons)	Deck Height Off Rail (inches)	Weight (lbs)
EXCAVATOR TYPE MACHINERY CARTS				
6882D2: DX-RC-MAC-8ftx8ft6-DMX-06TC - Machinery Cart TRANSPORT SIZE: Width: 8 ft 6 in / Length: 10 ft 3 in Deck width: 96 inches Usable deck length: 8 feet 6 inches Size suited for 6T excavators	Steel decking 4 wheel air brake Directional lights Front rail clamps Removable car hauler ramps with support legs 4 bolt pintle hitches 6 foot towbar	06	20	3,600
7583D1: DX-RC-MAC-8ft6x25-DMX-40TC - Machinery Cart TRANSPORT SIZE: Width: 8 ft 6 in / Length: 25 ft Deck width: 101 inches Deck width with swingouts open: 129 inches Usable deck length: 242 inches Options: Pin on railcar coupler adapter	Apitong wood decking 4 wheel air brake Directional lights Gasoline power unit Hydraulic stabilizers Standard tow hitches Pintle hitches + 6 foot towbar Fixed ramp (excavator)	40	23.3	16,140
ALL PURPOSE MACHINERY CARTS				
7941D1: DX-RC-MAC-8ft6x39-DMX-50TC - Machinery Cart TRANSPORT SIZE: Width: 8 ft 6 in / Length: 39 ft Deck width: 102 inches Deck width with swingouts open: 118 inches Usable deck length: 28 feet / 336 inches Features (4) axles twin bogie railgear	Apitong wood decking Air brakes (train and truck) Directional lights Gasoline power unit Hydraulic stabilizers Standard tow hitches Railcar coupler (car mover) 75T pintle hitches Hydraulic ramp (multi-machine)	50	26	29,000
8257D1: DX-RC-MAC-9ft6x45-DMX-100TC - Machinery Cart TRANSPORT SIZE: Width: 9 ft 6 in / Length: 45 ft Deck width: 115 inches Deck width with swingouts open: 135 inches Usable deck length: 36 feet / 432 inches Features (4) axles twin bogie railgear	Apitong wood decking Air brakes (train and truck) Directional lights Gasoline power unit Hydraulic stabilizers Standard tow hitches Railcar coupler (car mover) 75T pintle hitches Hydraulic ramp (multi-machine)	100	32.3	42,160
Extra Wide Frame 8257D1: DX-RC-MAC-12ft4x45-DMX-100TC - Machinery Cart TRANSPORT SIZE: Width: 12 ft 4 in / Length: 45 ft Deck width: 148 inches (12 ft 4 in) Deck width with swingouts open: 135 inches Usable deck length: 36 feet / 432 inches Features (4) axles twin bogie railgear	Apitong wood decking Air brakes (train and truck) Directional lights Gasoline power unit Hydraulic stabilizers Standard tow hitches Railcar coupler (car mover) 75T pintle hitches Hydraulic ramp (multi-machine)	100	32.3	52,500
Design and specifications are subject to change without notice.				
All carts listed feature non-insulated railgear and are suited for standard gauge track 56.50 inches (1435mm). Custom solutions are available for narrow and wide track gauges. Contact DymaxRail Sales 1-800-530-5407 for special applications and options.				



DYMAXRAIL
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com