



RAILWAY BALLAST PLOW ATTACHMENT

When freight traffic or MOW work leaves a mess on your track, this rail plow clears it in one pass. The DymaxRail Ballast Plow mounts on your backhoe, excavator, or wheel loader, and rides the rail on integrated wheels — no dedicated cleanup machine needed. Drive forward, and the V-blade moves spilled material from the centerline to both shoulders in one pass. Configured for narrow, standard, or broad gauge rail networks, with replaceable bolt-on cutting edges.

KEY BENEFITS

- **Integrated rail wheels with bearings:** Self-guided on rail as the operator drives forward.
- **HD stabilizer arms with replaceable front pads:** Keeps the blade at a consistent cutting depth across uneven ballast. Pads are field-replaceable without removing the attachment.
- **V-shape blade with bottom skid shoe:** Splits material at the centerline and routes it to both shoulders in one pass. Skid shoe protects the rail surface.
- **Replaceable bolt-on cutting edges:** Poly standard. Rubber available.
- **Standard, narrow, or broad gauge.**
- **Custom design solutions:** Contact DymaxRail.

APPLICATIONS

- **Clean up commodity spills:** Sand, coal dust, gypsum, silica, and fine aggregates. Common on corridors adjacent to bulk freight operations.
- **Push displaced ballast** off the centerline and back to the shoulders after tie replacement or tamping work.
- **Shape and dress track shoulders** for proper ballast profile and drainage after undercutting or ballast renewal.
- **Spot cleanup** during maintenance windows.




HOW THE V-DESIGN WORKS

Most plow blades push material forward or to one side. The DymaxRail Ballast Plow uses a V-shaped blade that splits material at the centerline and routes it outward to both shoulders simultaneously — so one forward pass clears the full track width.

Model Code	Description	Weight
DX-BL-RP-102inx28in-BL-10	Blade-Rail Plow-102in wide x 28in tall-Backhoe Loader-Class 10	2500 lbs
DX-BL-RP-102inx28in-WL-50	Blade-Rail Plow-102in wide x 28in tall-Wheel Loader-Class 50	2650 lbs
DX-BL-RP-102inx28in-WL-60	Blade-Rail Plow-102in wide x 28in tall-Wheel Loader-Class 60	2650 lbs
DX-BL-RP-102inx28in-HX-12T	Blade-Rail Plow-102in wide x 28in tall-Hydraulic Excavator-12 Ton	2650 lbs
DX-BL-RP-102inx28in-HX-25T	Blade-Rail Plow-102in wide x 28in tall-Hydraulic Excavator-25 Ton	2750 lbs

Design and specifications are subject to change without notice. Contact DymaxRail Sales for custom solutions: 1-800-530-5407.

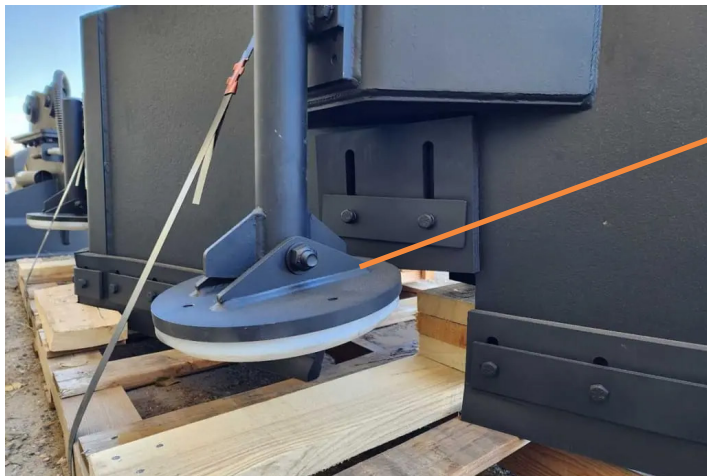

Bottom skid shoe protects the rail surface.



DYMAXRAIL
402 Miller Drive
Wamego, KS 66547 USA

Toll Free: 800.530.5407 (USA/CAN)
Office: +1.785.456.2081
Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com