




DELIVER 80-100 FT RAIL WITHOUT RIGGING

Keep your flash-butt welder fed. The Dymax Rail Handler LG is **roughly 10x faster than traditional crane-and-rigging methods**. All four grapple heads lock independently, holding the rail across its full length, while a 60° hydraulic rotator positions each string for precise placement. Available for 20-ton excavators with pin grab or tiltrotator hookup.

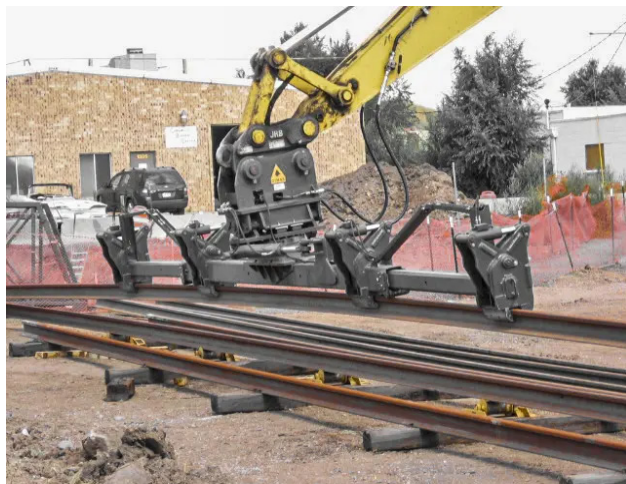

KEY FEATURES

- Manual telescopic arms — 16 foot retracted, 27 foot fully extended
- Hydraulic rotator with 60 degrees of positioning
- Positive-lock grapple system with load-holding cylinders
- Pin grab or tiltrotator coupler
- Storage stand for stowing and transport



POSITIVE LOCK RAIL GRABS


Each of the four grapple heads uses a hydraulic positive-lock cylinder that holds the rail independently. If hydraulic pressure drops, the lock holds.

Telescopic arms extend manually from 16 ft to 27 ft, spacing the four grip points across the full length of the rail string.

SEE HOW IT WORKS

Holland LP delivers rail to flash butt welders with the Dymax Rail Handler LG. (Customer's video starts at 0:14)

<https://youtu.be/0Yn9n0k16g4?si=fXpgtqVSjNZWOs7M&t=14>

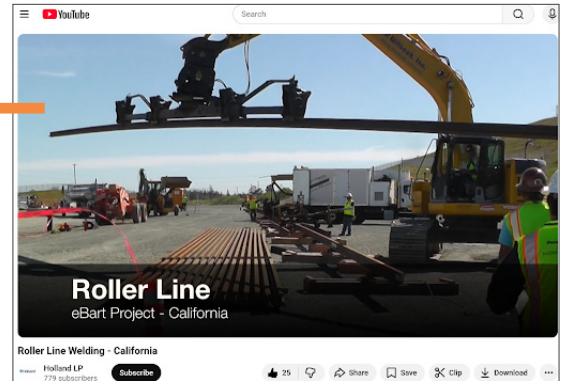

SPECIFICATIONS

Model Code	Description Hydraulic Requirements	Weight (lbs)
DX-RH-LG60-16ftx27ft-HX-20T	Rail Handler-Large Grapple 60 deg rotate-16 feet retracted x 27 feet extended-Hydraulic Excavator-20 Ton HYDRAULIC REQUIREMENTS: Your machine will require the following circuits for operation. CIRCUIT 1: Rail Grapples. Type: Two-way. GPM (min/max) 15-20. PSI (max) 3,000. CIRCUIT 2: Rotator. Type: Electro-Hydraulic Valve + needle valves. Requires installation of 16AWG cabling, connectors, and switch. NOT SUPPLIED: Jumper hose lines	5200
DX-RH-LGTRQ-16ftx27ft-HX-20T	Rail Handler-Large Grapple-Tilt Rotator Coupler-16 feet retracted x 27 feet extended-Hydraulic Excavator-20 Ton HYDRAULIC REQUIREMENTS: our machine will require the following circuits for operation. CIRCUIT 1: Rail Grapples. Type: Two-way. GPM (min/max) 15-20. PSI (max) 3,000. NOT SUPPLIED: Jumper hose lines.	4000

Design and specifications are subject to change without notice. Contact DymaxRail for custom design solutions.



DYMAXRAIL
 402 Miller Drive
 Wamego, KS 66547 USA
 Toll Free: 800.530.5407 (USA/CAN)
 Office: +1.785.456.2081
 Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com