

RAIL RIDER X2 HI-RAIL ATTACHMENT



HI-RAIL YOUR **25-TON EXCAVATOR** IN DAYS

BUILT FOR **HEAVY DUTY WORK**

Best for: Production & heavy-duty work + MOW + daily rail operations

Patent-pending wedge-locking railgear for 25-ton track excavators delivers true attachment-based hi-rail performance for serious rail work. No cutting. No welding. No permanent machine modifications. Just a stronger, more stable platform designed for maintenance-of-way crews, material handling, and daily railway operations while protecting OEM integrity and machine value.

RAILGEAR FEATURES

- A. No Machine Modifications:** Detachable heavy-duty frame designed for fast installation and simplified fit-up.
- B. 2-Speed Twin-Axle Hydrostatic Drive** system and stabilizers operate through standard travel pedals and require no unnecessary manifold swaps.
- C. 16-Inch Rail Wheels** provide heavy-duty service life. Available in insulated or non-insulated designs with replaceable brake shoes and fail-safe SAHR (spring-applied hydraulic release) braking. *Manual hydraulic hand pump supplied.*
- D. Self-Contained Power Systems** with automatic directional lighting provide red and white illumination based on travel direction.
- E. Tow Hitch** for moving trailers or carts, with rail sweeps to keep debris clear during rail operations.
- F. Select Low-Profile or Outrigger Hydraulic Stabilizer Options**, both operating through standard travel controls for exceptional working stability.
- G. Pre-Hosed Assembly** for quick fit-up for Caterpillar 325, John Deere 210, 245, Komatsu PC238 and other 20-25 ton track excavators.



Operates from the
standard excavator
travel pedals

Select Stabilizer Option (F)



MODELS	STABILIZER	DESCRIPTION	WEIGHT (LBS)
DX-RRDH-X2S-CAT320	Yes	Rail Rider Hydrostatic-X2 Series Mount with Stabilizers	16,000 w/o stabilizers 18,200 with stabilizers
DX-RRDH-X2S-CAT325	Yes	Rail Rider Hydrostatic-X2 Series Mount with Stabilizers	
DX-RRDH-X2S-DEERE210	Yes	Rail Rider Hydrostatic-X2 Series Mount with Stabilizers	
DX-RRDH-X2S-DEERE245	Yes	Rail Rider Hydrostatic-X2 Series Mount with Stabilizers	
DX-RRDH-X2S-DEERE250P	Optional	Rail Rider Hydrostatic-X2 Series Mount	
DX-RRDH-X2S-KOMATSUPC238	Yes	Rail Rider Hydrostatic-X2 Series Mount with Stabilizers	
DX-RRDH-X2INSTALLDMX		DymaxRail Installation @ Factory	
DX-RRDH-X2INSTALLREM		Remote Installation Assistance (<i>Priced per Customer</i>)	

Design and specifications are subject to change without notice. Contact DymaxRail for 20- to 25-ton excavator models not listed.



All X2 models include labeled hoses, bulkhead connections, integrated manifolds, advanced valve technology, and Magnum filtration for simplified installation and faster, long-lasting hydraulic performance.

25 TON STANDARD - X2 / X2S

- Standard rail gauge (1435 mm / 56.50 in)
- Patent-pending removable machine adapter with full undercarriage support.
- High-strength front and rear lift groups with integrated load checks.
- Hydraulic release, spring-applied shoe brakes on all wheels for maximum holding force.
- Replaceable DymaxRail non-insulated wheels. (Insulated upgrade available.)
- Rail sweeps and bolt-on underframe guard package.
- Twin drive axles with 2-speed motor and gearbox.
- Tow hitch on both sides with included 4 foot tow bar.
- FRA installation kit including beacon, fire extinguisher, tape, decals, and first aid kit. (Available in U.S./Canada markets.)
- Hydraulic stabilizers: Select between low-profile for compact clearance requirements or outriggers for wide stance stability.


20 & 25-TON OPTIONS

- Insulated design
- Select stabilizer option



FRA installation kit for excavator fit-up and rail-ready installation.

Shipping Dimensions with Stabilizers

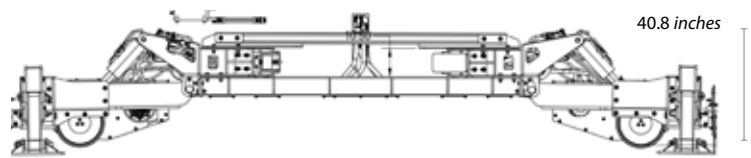

267 inches with Stabilizer Options



DYMAXRAIL | Toll Free: 800.530.5407 (USA/CAN)
 402 Miller Drive | Office: +1.785.456.2081
 Wamego, KS 66547 USA | Fax: +1.785.456.8328

www.DYMAXRAIL.com
sales@DYMAXRAIL.com